

Single-side Hot and Cold Laminator


EASY LAMINATE-1700



Features

- Single-side Hot and Low-heat lamination
- Auto-matic, saves labour
- Lamination width up to 1620mm
- Accurate pressure adjustment ensures better finishes
- Multiple uses without bubbles

Process

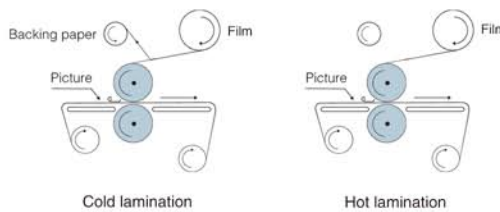

Configuration

- Adjustable ISO quality 90w motor
- Stainless steel front and back working table
- 130mm upper silicon roller
- 130mm anti-glue lower silicon roller
- Auto-take-up system
- Anti-tilt and anti-fold device(Origin)
- Pressure and height adjust air cylinder
- Infrared temperature control device
- Multi-function footswitch
- Hand-protect device and squaring guide

Parameter

Max lamination width	1620mm	Preheating time	10-15mins
Max lamination thickness	30mm	Power consumption	0.8-1.0kw/h
Speed	0-7m/min	Power input	2200w
Max temperature	120°C	Volt input	110/220v
Height adjustment	Air cylinder	Net weight	200kg
Heated method	Infrared	Dimensions	700x2040x1180mm



Thick feeding tray with squaring guide and paper guide ensures precise application



Fully adjustable height and pressure by air valve




High quality air cylinder



Once laminated, the prints can wound onto the take-up roll



Once laminated, the prints can wound onto the take-up roll



Storage of up to 3 film rolls easily reachable under the laminator

Address: 71/B, Shivaji Marg, N. Delhi-15, Phone: 011 45410142, 45507946

E-mail : info@strategicprintingsolution.com / sales@strategicprintingsolution.com

Web: <http://www.strategicprintingsolution.com>